

Indication lights

On the front of Todos Argos Mini II you will find 2 indication lights:



When lit: Argos Mini II is connected to the computer and has power.

When lit: A smart card is correctly inserted.

Flashing: Data is being transferred between Argos Mini II and the computer.

EMV™
level 1



Designed for

Microsoft®
Windows®XP
Windows®2000
Windows®ME

*All trademarks or trade names are the property of their respective owners.



TODOS DATA SYSTEM AB

Göteborg, Sweden
www.todos.se

7 331887 119817

Todos Argos Mini II

Installation guide

Guide version 1.0 - English
October 2003



Introduction

Use this guide when installing Todos Argos Mini II smart card reader.

You connect the Todos Argos Mini II to your PC using a USB cable. Please check that you have a vacant USB port on your computer. Todos Argos Mini II can be used with Microsoft Windows 98/ME/2000/XP.

If you have any problems during the installation you may find necessary help and download the latest drivers from Todos homepage:
www.todos.se


Disclaimer

The information contained in this guide is valid at the time of print. Todos Data System AB reserves the right to make any changes or improvements either in the product or in this guide, at any time and without notice. Consequently Todos Data System AB assumes no liability for damages incurred directly or indirectly from error, omissions or discrepancies between the product and the guide.

Installation - Windows 2000 and XP

1. Connect Argos Mini II to a vacant USB port.

Note! For Windows XP the installation may be fully automatic, with the following messages:

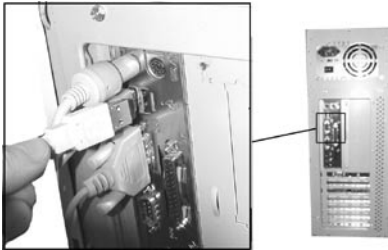

2. Windows will recognize the new hardware. Choose "Install the software automatically", click "Next".

Note! If you install on Windows 2000 the question "Where do you want to search for driver files?" appears. Check "Windows Update" and click "Next".



3. Windows will search for the best drivers on Windows Update and install them.

Note! You must be connected to the Internet in order to access Windows Update.



4. The installation is complete. Click "Finish".



Installation - Windows 98 and ME

Since the necessary PC/SC drivers are not included with Windows 98 and ME the automatic installation using Windows Update will not work. Instead, download the drivers from Todos homepage www.todos.se

Go to Argos Mini II Support. There you will also find instructions on how to install the reader manually for all versions of Windows.

In case of error

If Windows can't find a suitable driver for Argos Mini II automatically it can be downloaded from Todos homepage: www.todos.se

Go to Argos Mini II Support. There you will find instructions on how to install the reader manually.

